


Vandal-proof Pushbuttons prh-VT1 & prh-VT2

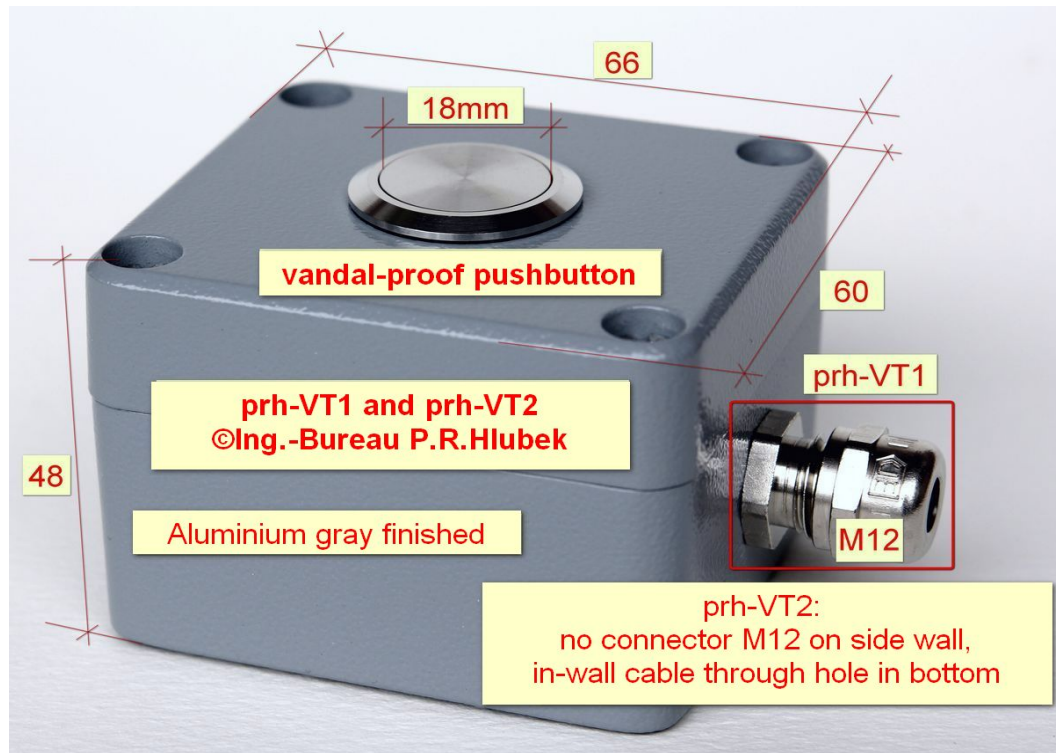

Pushbutton:

Stainless steel, Diameter of movable part = 18mm, Swing = 3mm, Screwed connection,

Mechanical lifetime: 1 Mio. cycles of operation

IP-Rating front protection: IP65 and IP67, as per IEC 60529

Impact resistance: IK10, as per IEC 62262

Working temperature range: -30 °C ... +70 °C

Housing: Aluminium, light gray finished, 2 hidden holes for wall mounting

Option VT1: cable screw connection M12 for mounting on side wall (s. above), clamping range 3...6 mm, galv. nickelized, IP68 until 5 bar.

Option VT2: Cable connection through bottom hole (hidden cable in-wall)

Weight: 230 g

HLUBEK-electronic

Ing.-Bureau Dipl.-Ing. P.R. Hlubek

Mittelstr. 14, 56307 Duerrholz

Ust.Id.: DE 149 461 045

WEEE-Reg.Nr.: DE 826 350 36

www.hlubek.de

prh@hlubek.de

Tel. (49) (2684) 6205 Fax. (49) (2684) 6291